

Integration Performance Installation Guide

HYUNDAI

IP-HYU5C
IP-HYU6C
IP-HYU62

Dear Customer,


Thank you for choosing Morel for your car audio speaker solution.
Morel prides itself on engineering and producing the best high-fidelity speaker systems.
We hope you enjoy your Integration Performance speakers for years to come.
If you have any questions, please contact your Morel dealer or Morel support at:
www.morelhifi.com

Components and Installation

Component System



x2
6″ Woofer



x2
Tweeter

Coaxial System




x2
6″ Coax




x2
5″ Coax

Door Installation

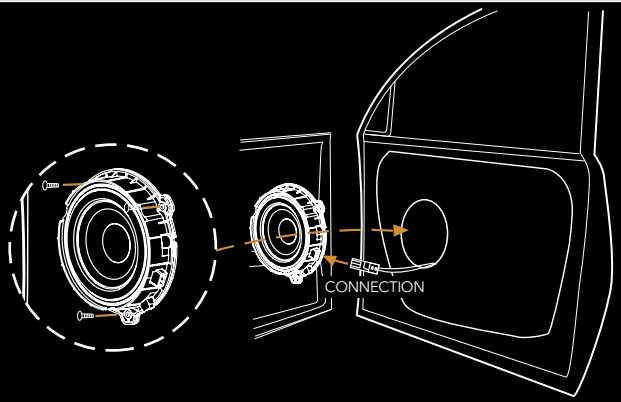

Tweeter Installation

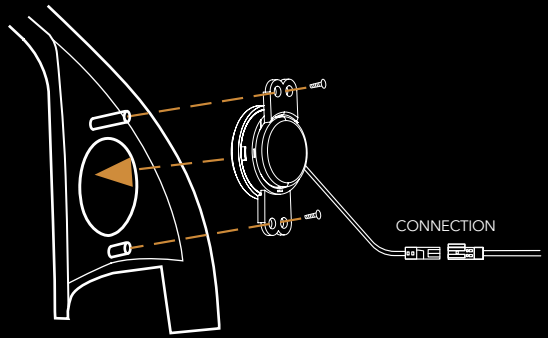

Specifications

SYSTEM	IP-HYU5C	IP-HYU62	IP-HYU6C
Nominal Impedance (ohm)	4	4	4
Power Handling Wrms	70	90	80
Max. Trans. Pwr Handling Wrms	140	180	160
Sensitivity (2.83 V/1M) dB	89.5	92	91
Frequency response Hz	55-20000	50-20000	55-20000
Voice Coil Diameter	W:25 mm (1") / T:20 mm (0.78")	W:25 mm (1") / T:20 mm (0.78")	W:25mm (1") / T:20 mm (0.78")
Magnet System	W:High Grade Ferrite Magnet / T:Neodymium	W:High Grade Ferrite Magnet / T:Neodymium	W:High Grade Ferrite Magnet / T:Neodymium
Cone Material	W:Paper / T:Soft dome	W:Paper / T:Soft dome	W:Paper/ T:Soft dome

* Morel operates a policy of continuous products design improvement, consequently specifications are subject to alteration without prior notice

Morel, Ness Ziona, 70400 Israel.
Tel: +972-8-9301161
Fax: +972-8-9301312
E-mail: info@morelhifi.com

Morel America, Chandler, AZ, USA
Toll free number:1-877-667-3511
Fax: 1-718-721-1560
E-mail: info@morelamerica.com

www.morelhifi.com