Jackery

JA-AD01A

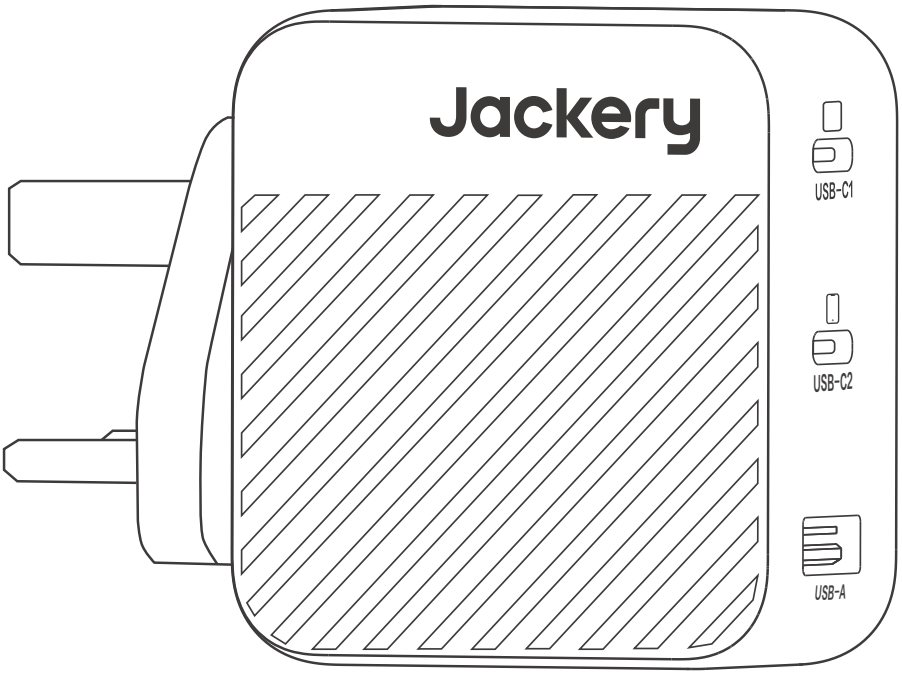

USER MANUAL

Jackery 102W GaN 3-Port Fast Charger

WHAT'S IN THE BOX

①



Jackery 102W GaN
3-Port Fast Charger

②



100W
Charging Cable

③



User Manual

PRODUCT OVERVIEW

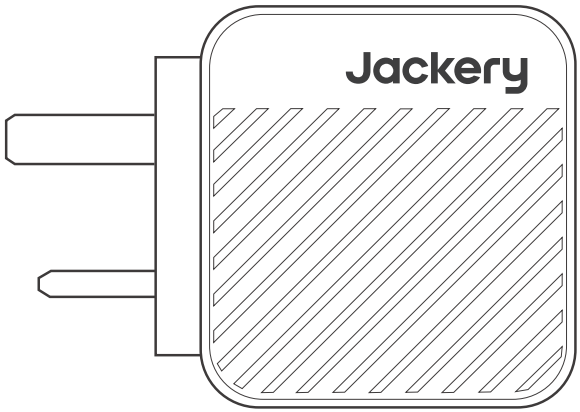

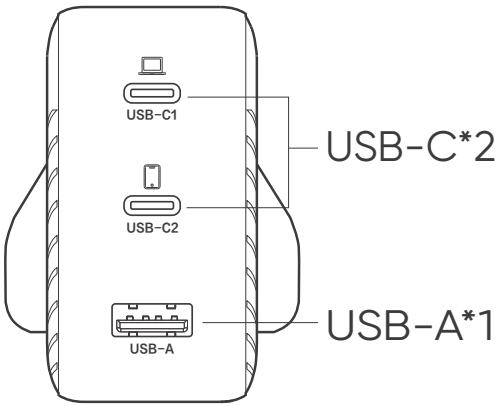

USING YOUR PRODUCT

Connect your devices to the USB ports

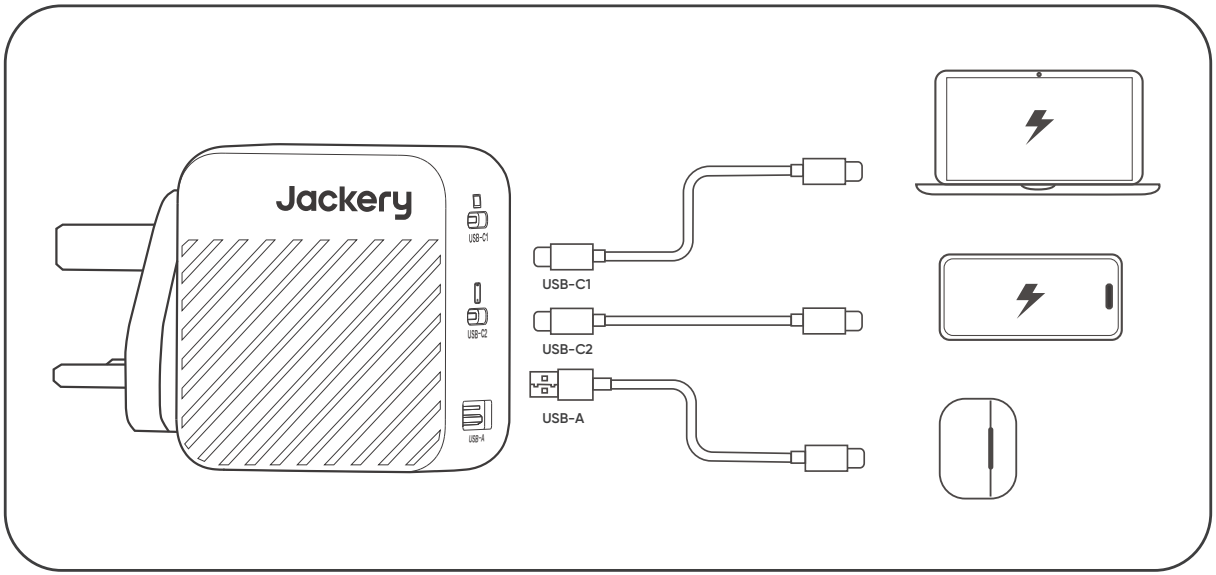

SPECIFICATIONS

Product Name	Jackery 102W GaN 3-Port Fast Charger
Model	JA-AD01A
Dimensions	62*87*33mm
Weight	195g±5g
Input	100-240V~50/60Hz, 1.8A Max
Output	**Single-port output** • USB-C1 output: 100W Max, 5V⎓3A, 9V⎓3A,12V⎓3A, 15V⎓3A, 20V⎓5A PPS: 5V-11V⎓4.05A • USB-C2 output: 100W Max, 5V⎓3A, 9V⎓3A,12V⎓3A, 15V⎓3A, 20V⎓5A PPS: 5V-11V⎓4.05A • USB-A output: 18W Max, 5V⎓3A, 9V⎓2A, 12V⎓1.5A **Dual-port output** • USB-C1+USB-C2 output USB-C1 output: 5V⎓3A, 9V⎓3A, 12V⎓3A, 15V⎓3A, 20V⎓3.25A;

PPS: 5V-11V ⎓4.05A
USB-C2 output: 5V⎓3A, 9V⎓3A, 12V⎓2.5A
PPS: 5V-11V⎓2.7A

- USB-C1+USB-A output

USB-C1 output: 5V⎓3A, 9V⎓3A, 12V⎓3A, 15V⎓3A, 20V⎓3.25A;
PPS: 5V-11V⎓4.05A
USB-A output: 5V⎓3A, 9V⎓2A, 12V⎓1.5A

- USB-C2+USB-A output: 5V⎓3A

Triple-port output

- USB-C1+(USB-C2+USB-A) output

USB-C1 output: 5V⎓3A, 9V⎓3A, 12V⎓3A, 15V⎓3A, 20V⎓4.35A;
PPS: 5V-11V⎓4.05A
USB-C2+USB-A output: 5V⎓3A

WARNING

1. Please read the below information carefully.
2. Please do not expose the charger to moisture.
3. The charger shall be installed according to specification.
4. The max ambient temperature should not exceed 25°C.
5. The charger shall not be exposed to dripping or splashing and no objects filled with liquid shall be placed on the charger.
6. The main plug of this charger is used as disconnect device, the disconnect device shall remain readily operable.
7. For indoor use only.
8. This charger is not intended to be repaired by service personnel in case of failure or component defect.
9. This product must not be disposed together with the domestic waste. This product has to be disposed at an authorized place for recycling of electrical and electronic appliances. By collecting and recycling waste, you help save natural resources, and make sure the product is disposed in an environmentally friendly and healthy way.
10. Designed to supply power for general use or battery charger use.
11. To achieve 100W output, the fast charger must be

paired with a 100W charging cable. For safe and fast charging, please use the charging cable included with the product.

WARRANTY

The product is covered by a limited warranty from Jackery for the original purchaser that covers the product from defects in workmanship and materials for 24 months from the date of purchase (damages from normal wear and tear, alteration, misuse, neglect, accident, service by anyone other than authorized service center, or act of God are not included).

During the warranty period and upon verification of defects, this product will be replaced when returned with proper proof of purchase.

CUSTOMER SERVICE

24-month limited warranty

Lifetime technical support

hello.eu@jackery.com

AUTHORIZED REPRESENTATIVE:
JACKERY UK LTD

Address of Authorized Representative: Suite B Fairgate House, 205 Kings Road Tyseley Birmingham B11 2AA GB

+44 808 164 2377

hello.eu@jackery.com

www.jackery.com

MANUFACTURER:
L LAB CORPORATION (HUIZHOU)LIMITED

Address of Manufacturer: West Wing,2nd Floor, Factory Building A,No.13 Jinda Road, Huiao Hi-Tech Industrial Park, Hui'ao Way HUIZHOU Guangdong 516000

0752-2143391

ryq@llabdynamic.com